




Kenadrain I Channel width 200 with galvanized steel mech grating class B125

Code : DR202BC



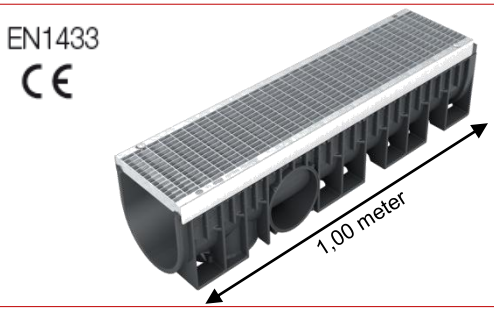

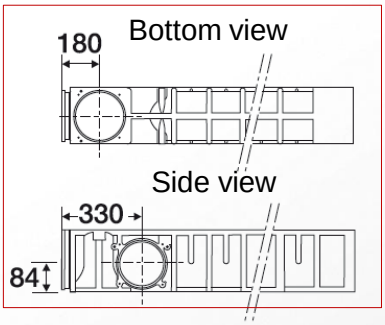

■ FUNCTION :

The drainage channel is designed to evacuation run-off water. In accordance with the EN1433 standard and the CE marking, it can be used in footways, pedestrian areas and comparable zones, private car parks or car parking decks in class **B125**.

■ DESCRIPTION :

It is comprised of:
- a injected recycled polypropylene black body
- two galvanized steel edges.
- one galvanized steel mech grating class B125
- four locking systems with bolt



SBDR20



SZDR20



PS200B

■ ACCESSORIES :


The connection to the sewage can be achieved through the following PVC fittings:
- End cap & inlet-outlet cap Ø160 – NZDR202
- Lateral outlet Ø160 – SZDR20
- Vertical outlet Ø200 – SBDR20
- Sump units EKSO Ø200 – PS200B




NZDR202

■ CARACTERISTICS :

Resistance class: B125
Effective width: 206 mm
Effective depth: 200 mm
Grating type: galvanized steel mech
Drainage surface: 1530 cm²/ml
Hydraulic section: 358.9 cm²
Opening dimensions: 33 x 15 mm
Weight: 19.7 Kg



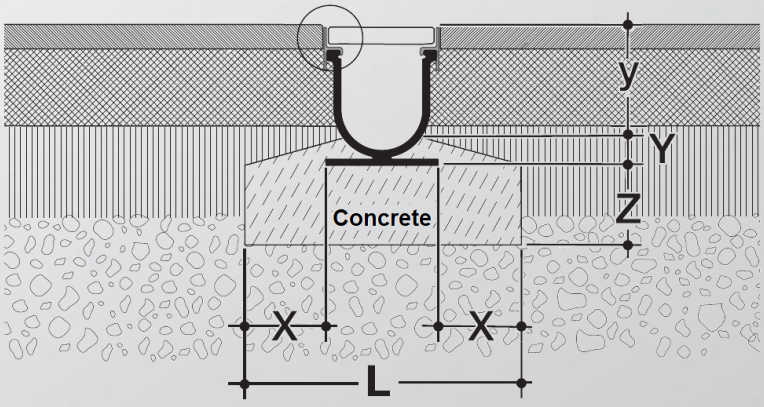

■ IMPLEMENTATION :

X = 100 mm; L = 450 mm
Z = 100 mm; Y = 50 mm; y = 190 mm

■ QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS Certification

DATE : May 2014