MASTERTEC GmbH & Co. KG
Spezialartikel für den Stahlbetonbau

Im Maintal 13
96173 Oberhaid, Deutschland
Tel. +49 (0) 9503 5047-0
info@mastertec.eu


DATA SHEET

FLEX 2000 Sealing Compound

single-component vapour- and waterproof sealing compound for annular gap sealing

Article number: 120610



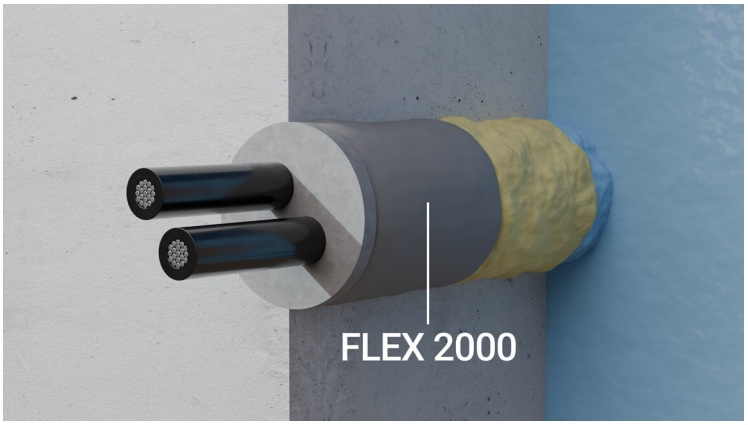

Visit website

Installation instructions

See the price list

en Stand: 13.10.2026

4251689531408

DATA SHEET

FLEX 2000 Sealing Compound

Technical details

consistency:	paste-like, non-sagging
odour:	odourless
solvent content:	solvent free
application temperature:	appox. + 5 ° C bis +35° C
subsurface temperature:	approx. + 5 ° C bis +35° C
required amount:	approx. 1,6 kg per litre void
test certificate / approvals:	Test report MFPA Leipzig Nr.: U/5.1/08-043
cleaning of tools:	with universal cleaner following use
shelf life:	approx. 2 years at 20? c
density:	1,6 g/cm³ (DIN EN ISO 1183-1)
waterpressuretightness:	up to max. 0,75 bar (7,5 m water coumn)
material:	polyolefin
Resistance:	On request
colour:	grey

General information

Article number:	120610
article group:	450 - Flex 2000 + Zubehör
GTIN:	4251689531408
customs tariff number:	32149000
packing unit:	pc

sales quantity unit:	1 Stk
storage:	Store in undamaged and unopened orginal packaging in a dry place out of direct sunlight.
disposal:	Can be disposed of at municipal waste landfill sites, taking into account the local waste disposal regulations.

ACCESSORIES



Cartridge Applicator Gun with Flexible Nozzle

sku 120620



Flexible Nozzle

sku 120630

Basis

All dimensions and information in this data sheet reflect the results of the laboratory tests that have been carried out. Deviations from the values determined by us under laboratory conditions are possible due to environmental and operating conditions beyond our control. The data in this data sheet only applies for the product delivered by us. The product data corresponds only to the specifications in Germany. Possible country-specific deviations are not taken into account here.

Lifetime

The useful life of buildings is designed for 50 years, and so are the products that are installed. However, this can be shortened by external influences. The expected lifetime of our products depends to a large extent on the installation location (e.g. buried installation, damp environment, offshore, etc.). In addition, there are external influences such as exposure to chemical influences (e.g. acids, aggressive media, aqueous solutions, industrial waste water, oils, etc.) and ambient temperatures / operating temperatures. Ultimately, no generally valid statement can be made about the guaranteed service life of our MASTERTEC products, as this depends on many parameters (use, environmental influences, installation requirements, safety regulations, etc.). To ensure safe operation, we recommend continuous testing of the product, as part of an operating and maintenance manual to be prepared by the customer in accordance with the safety requirements.

Indication of law

The technical information reflects our current knowledge of the product described. It is intended only as information for users. As we do not know the envisaged applications and processing conditions, it is the responsibility of the user to carefully check that the product is suitable for the intended purposes. Due to the different components at the installation site and the working conditions in place there, MASTERTEC cannot provide any guarantee whatsoever for the result of the work. Claims arising from any legal relationship can only be recognised in the event of wilful intent or gross negligence, irrespective of the statements made here or advice provided verbally. In this case the user must prove that he has provided MASTERTEC in writing with all the information required to correctly assess the installation situation in good time. Subject to necessary product specifications or further developments. By providing this information MASTERTEC does not intend to infringe third party rights. The latest data sheet in each case applies. Our corresponding terms and conditions of sale and delivery apply.

The previous data sheets are no longer valid

Print date 13.10.2026 , last modified 09.10.2026