


Connecto® I Channel – Outside width 200mm - with cast iron gratings class B125

Code : CAN15BF



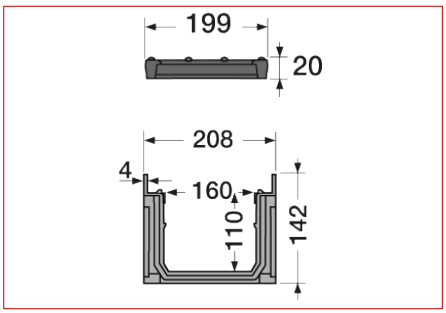

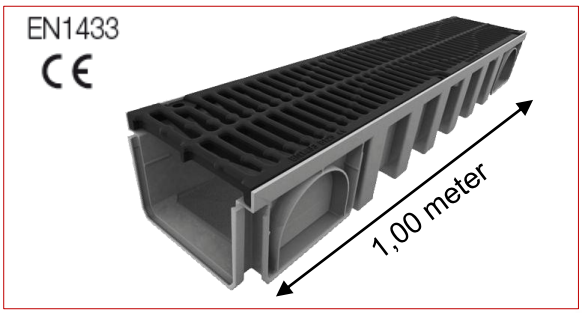

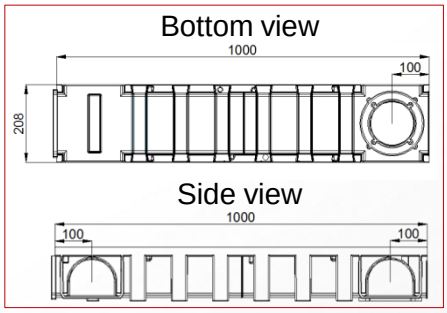

■ FUNCTION :

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking CE, it can be used in footways, pedestrian areas, private car parks or car parking decks in class **B125**.

■ DESCRIPTION :

It consists of:
- an injected polypropylene body in light grey colour with male/female interlocking system
- two cast iron gratings class B125



STCAN
SVCAN
SXCAN



NAT188
NAV188
NAX188




PSCVT
PSCVV

■ ACCESSORIES :

To fix a grating, it's necessary to use two FIXCAN2N (set made up of 1 screw covered with black zinc nickel and 1 insert of zamak bichromate).
The network connection can be realized thanks to the following PVC accessories :
- end cap/end or lateral outlet Ø100, 110 or 125 : NAT188, NAV188 or NAX188
- vertical outlet Ø100, 110 or 125 : STCAN, SVCAN or SXCAN
- sump unit with outlet Ø100 or 110 : PSCVT or PSCVV

■ CHARACTERISTICS :


Resistance class: B125
Effective width: 160 mm
Effective depth: 110 mm
Grating type: Cast iron
Drainage surface: 870 cm²/ml
Hydraulic section: 176 cm²
Opening dimensions: 14 / 169 mm
Weight: 11.4 kg



1



2

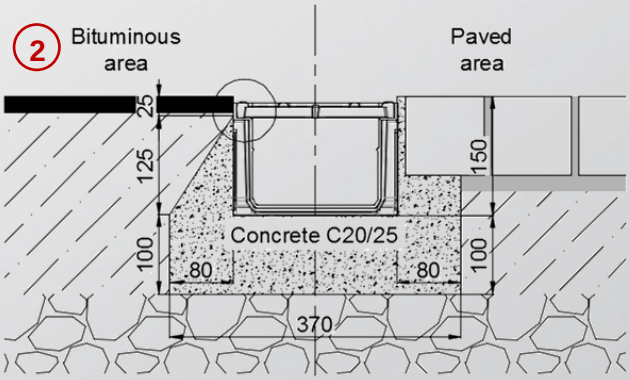

■ IMPLEMENTATION :

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

■ QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS Certification

DATE : July 2015

BUILDING - SANITARY - ENVIRONMENT
Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex
Email : export.nicoll@aliaxis.com

NON CONTRACTUAL DOCUMENT
an Aliaxis company