



Kenadrain I Channel 100mm wide with heel ductile iron gratings class C250 – Height 2

Code : DR102CH

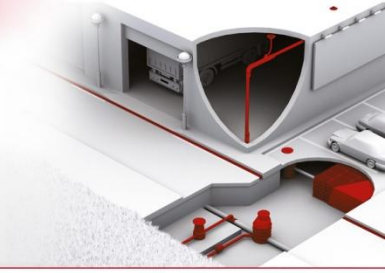

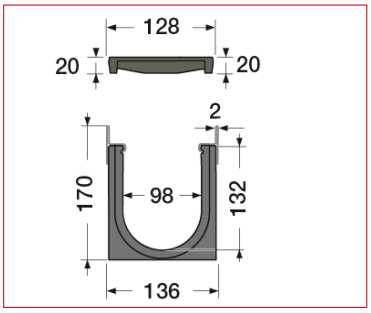

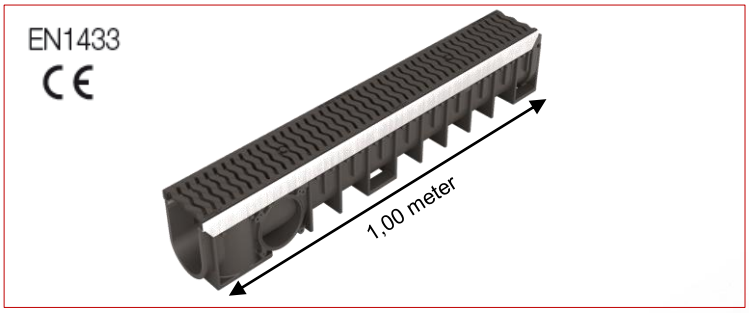

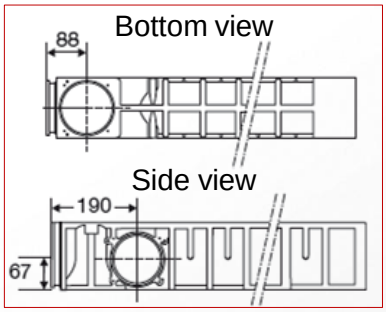

■ FUNCTION :

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

■ DESCRIPTION :

RAL 8015 Red Laterite | RAL 1015 Yellow Pyrite | RAL 5008 Blue Basalt | RAL 7046 Grey Lunare | RAL 6028 Green Malachite

It consists of:
- an injected recycled polypropylene black body
- two galvanized steel edges
- two black heel ductile iron gratings class C250
- 1 screw per grating on galvanized locking bar

Option : other colours are also available on request :
- red Laterite, yellow Pyrite, blue Basalt, grey Lunare and green Malachite



STDR10
SVDR10
SXDR10

■ ACCESSORIES :

To connect the channels to the underground network :
- end cap/end outlet Ø100 or 110 – NTDR102 or NVDR102
- lateral or vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X




NTDR102
NVDR102




PS100V
PS100X

■ CARACTERISTICS :

Resistance class: C250
Effective width: 98 mm
Effective depth: 132 mm
Grating type: Heel ductile iron
Drainage surface: 300 cm²/ml
Hydraulic section: 122 cm²
Opening dimensions: 6 / 104 mm
Weight: 13.5 Kg



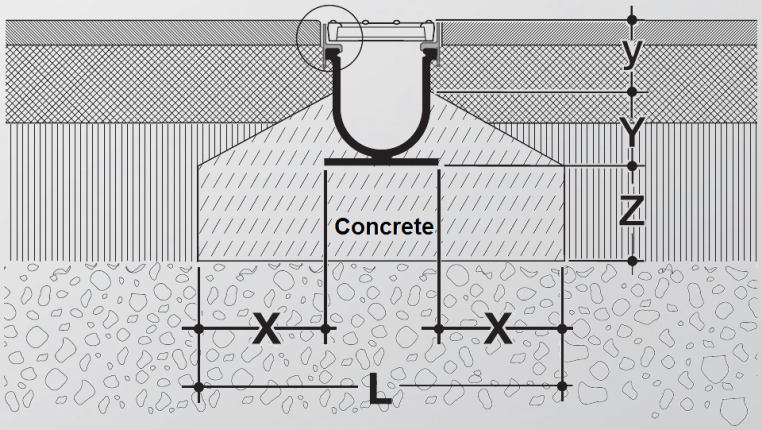

■ IMPLEMENTATION :

X = 150 mm; L = 440 mm
Z = 150 mm; Y = 90 mm; y = 85 mm

■ QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS Certification

DATE : August 2014

Nicoll BUILDING - SANITARY - ENVIRONMENT
Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex
Email : export.nicoll@aliaxis.com

NON CONTRACTUAL DOCUMENT
an Aliaxis company