

Kenadrain I Channel width 100 depth 4 with cast iron gratings class D400


Code : DR104DF

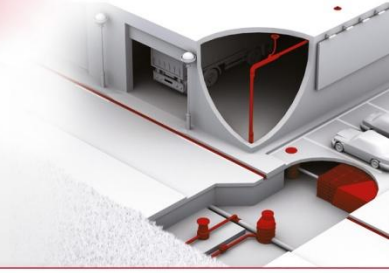




EN1433

CE

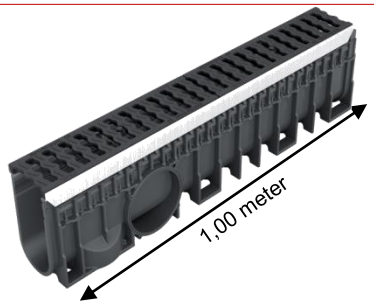

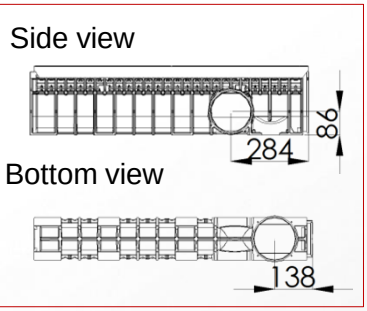

■ FUNCTION :

This product permits to drain run-off water with gratings of length 1000 mm, of class D400 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

■ DESCRIPTION :

It is comprised of:
- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class D400
- two locking systems with galvanized metal bar



STDR10
SVDR10
SXDR10



NTDR104
NVDR104




PS100V
PS100X


■ ACCESSORIES :

The connection to the sewage can be achieved through the following PVC fittings:
- End cap & inlet-outlet cap Ø100 or 110 – NTDR104 or NVDR104
- Vertical or lateral outlet (using the ADPS100) Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- Vertical or lateral outlet Ø160 – SZDR20
- Sump units Ø100 or 125 (using the ADPS100) – PS100V or PS100X
- Fitting piece for PS100X, PS100V, STDR10, SVDR10 or SXDR10 – ADPS100

■ CHARACTERISTICS :

Resistance class: D400
Effective width: 98 mm
Effective depth: 214 mm
Grating type: Cast iron
Drainage surface: 392 cm²/ml
Hydraulic section: 200 cm²
Opening dimensions: 18 / 96 mm
Weight: 18.3 Kg

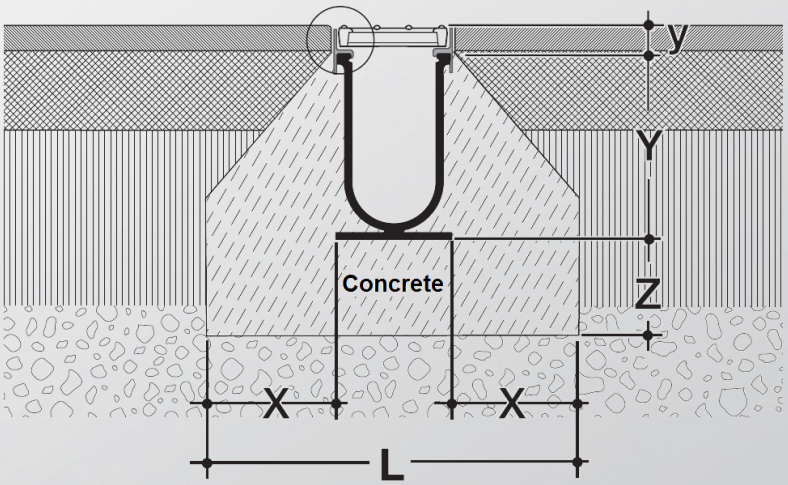



■ IMPLEMENTATION:

X = 200 mm; L = 540 mm
Z = 200 mm; Y = 220 mm; y = 35 mm

■ QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS Certification

DATE : May 2014